

料号审核:

1

2







3

4

5

6

变更说明		变更描述		原因		设计	日期
序号	0	-	-	-	-	0	-
1	-	-	-	-	-	0	-
2	-	-	-	-	-	0	-

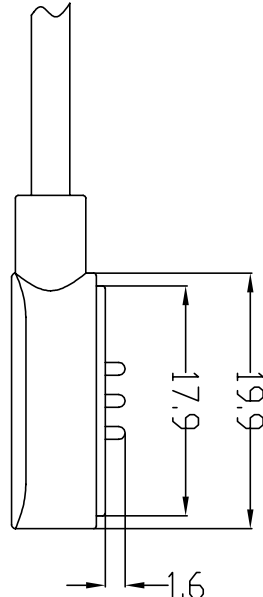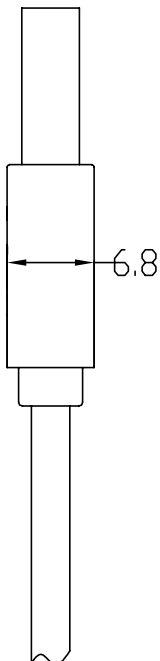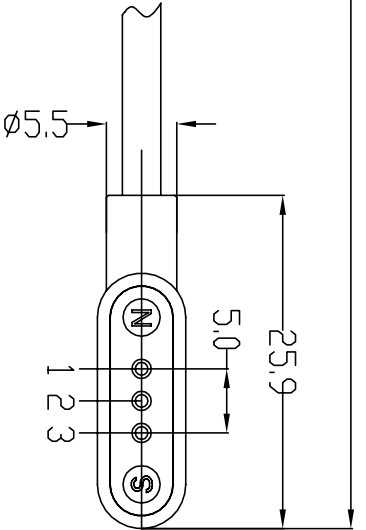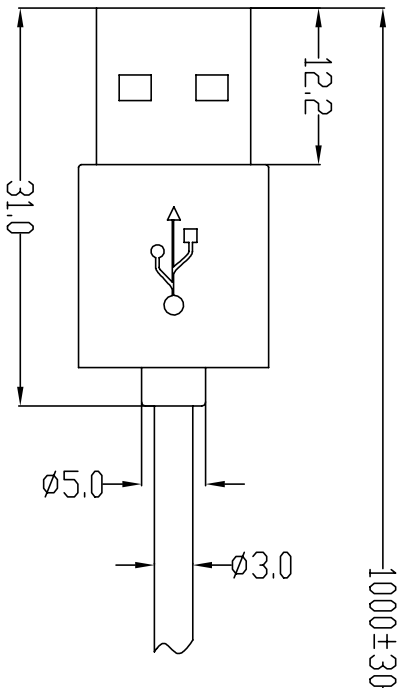


接线图

P1

P2

- 注意:
- a. 100%断/短测试.
 - b. 导通阻抗: 2Ω (max).
 - c. 绝缘阻抗: 300V/DC 10M Ω (min).
2. 摇摆测试: 吊重200g, ± 60 度 30次/分 2000次导通OK.
3. 额定电压 (PIN 接触): 5Volts
4. 额定电流 (PIN 接触): 1A maximum
5. 工作弹力单PIN:
- 1) 按压行程0.6mm (PIN 接触): 60gfMax
6. 寿命测试:
- 1) 按压行程0.6mm, 10,000次 (Min)
7. 工作温度范围: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$

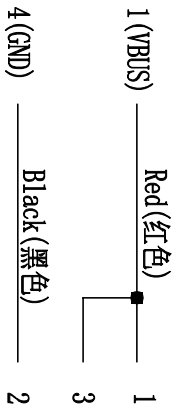

POMAGTOR

深圳市泰科汉泽精密电子有限公司

磁性连接—专业为您定制

Pomagtor Precision Electronics

3	-	-	PCS
2	-	-	PCS
1	-	-	PCS
序号	料号	用途	单位

描述		J1R3PIN公座磁吸线 白色PVC L=1M		版本	比例	单位
料号		-		A0	1:1	mm
图例		x ± 0.20		x ± 0.15	x ± 0.10	CNY
未标注公差		x $\pm 2^{\circ}$		x $\pm 0.5^{\circ}$	审核/日期	-

1

2

3

4

5

6

料号审核:

1

2




3

4



5

6

序号	变更描述	原因	设计	日期
0	-	-	0	-
1	-	-	0	-
2	-	-	0	-

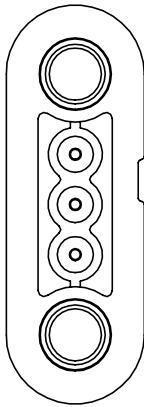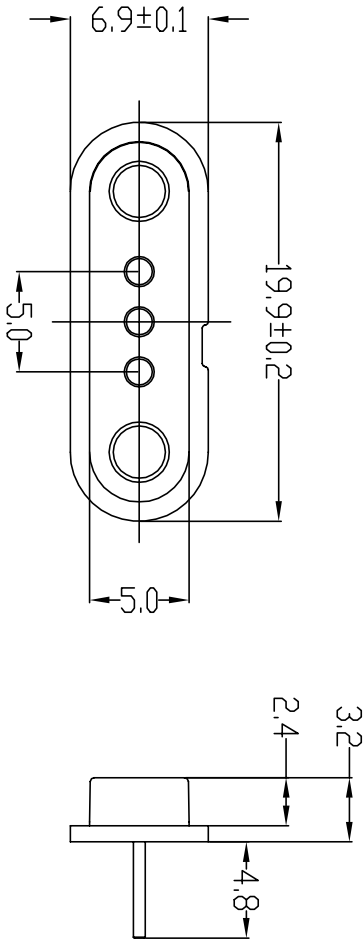

PCB LAYOUT
TOLERANCE: ±0.05

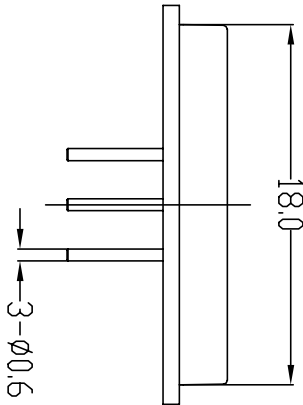

NOTES:
1.0 PLATING:
1)Contact plating:brass Au3u"over 50-80u" Ni
2)Housing:LCP white
3)Magnet:MS2

2.0 Rated voltage(Per Contact): 5 Volts
3.0 Rated Current(Per Contact): 2A maximum
4.0 Mechanical life:
1)(Mechanical life):30K Cycles Min
5.0 Working Temperature Range: -30~85°C

POMAGTOR
磁性连接-专业为您定制

深圳市泰科汉泽精密电子有限公司
Pomagtor Precision Electronics

序号	料号	描述	用量	单位
3	-	-	-	PCS
2	-	-	-	PCS
1	-	-	-	PCS

描述	料号	版本	比例	单位
ZKXZ-3PIN直插母座 白色 PITC2.5	-	A0	1:1	mm
未标注公差	x.±0.20	x.±0.15	x.±0.10	CNY
	x'.±2°	x.±0.5°		-