

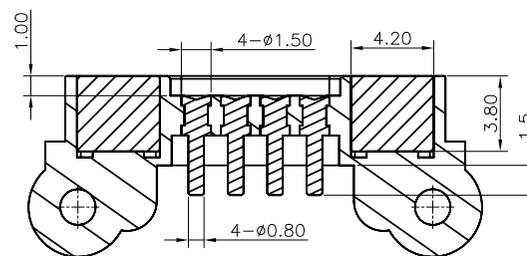




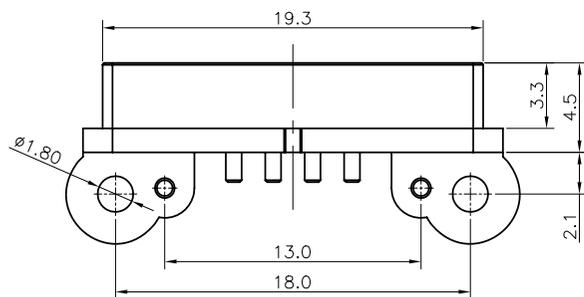


料号审核:

变更说明	序号	变更描述	原因	设计	日期
0		新版本发行	-	黄海祥	2020.10.16
1		-	-	-	-
2		-	-	-	-

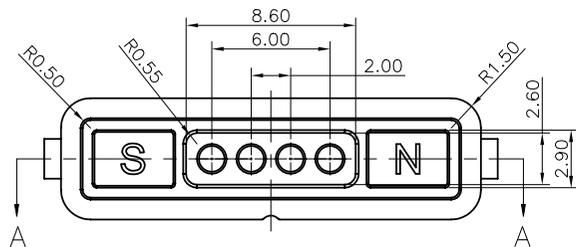

SECTION A-A

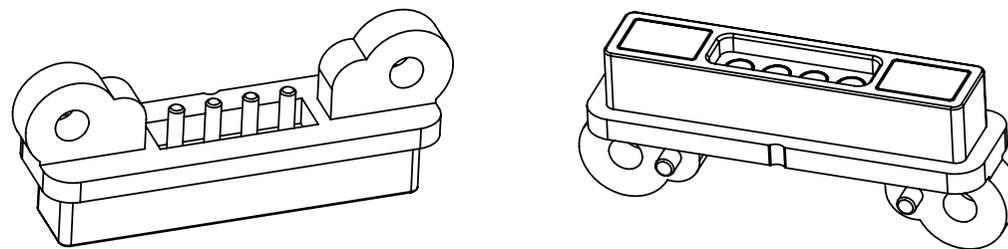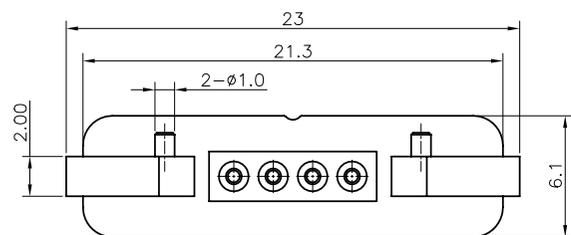

3D VIEW

## NOTES:

## 1.MATERIALS:

HOUSING: PA9T COLOR:BLACK.  
POWER PIN: C3604.  
MAGNET: N52.

## 2.PLATING:

POWER PIN: Au 5u" Min. OVER 50~120u" NICKEL.  
MAGNET: NICKEL PLATING.

## 3.ELECTRICAL:

RATED CURRENT: 2A.  
RATED VOLTAGE: 5V.  
INSULATION RESISTANCE: 100MΩ Min.  
DIELECTRIC WITHSTANDING VOLTAGE: 100V AT 60Hz.  
CONTACT RESISTANCE: 30mΩ Max. BEFORE TEST AND 60mΩ Max. AFTER TEST POGO PIN WORKING STROKE.

序号	料号	物料名称	描述	用量	单位
7	-	-	-	-	-
6	-	-	-	-	-
5	-	-	-	-	-
4	-	-	-	-	-
3	-	方形磁铁	方形磁铁4.2*2.9*3.8mm N52 表面镀镍 盐雾48H	2	PCS
2	-	插针	尺寸ø1.5*5.0mm 材质C3604 镀金5u" 盐雾48H	4	PCS
1	-	TK4PIN母座支架	尺寸23.0*6.1*9.1mm 材质PA9T黑色 PH=2.0	1	PCS

**POMAGTOR**  
磁性连接—专业为您定制

深圳市泰科汉泽精密电子有限公司  
Pomagtor Precision Electronics

描述	TK-4PIN母座磁吸连接器 PH=2.0 PA9T黑色			版本	A0	比例	1:1	单位	mm
料号	-			绘图/日期	黄海祥	2020.10.16	审核/日期	-	-
	未标注公差	x.±0.20	.x±0.15	.xx±0.10					
		x'.±2'	.x'±0.5'						