
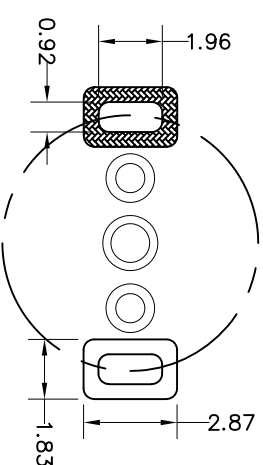
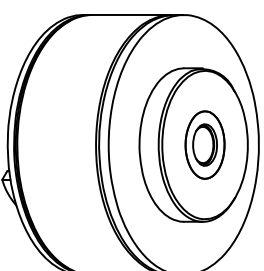

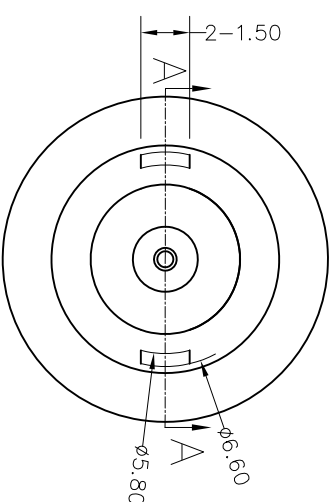
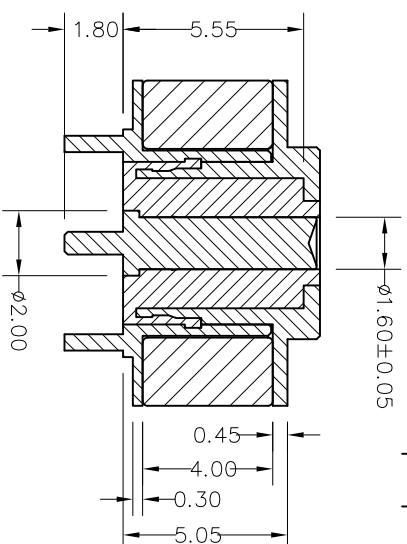



REV	ECN NO.	DETAILS	BY	DATE
1				
2				
3				

NOTES:

- 1.0 Rated voltage(Per Contact):5 Volts
2.0 Rated Current(Per Contact):2A maximum
3.0 Working Temperature Range: -30~85 °C
4.0 "▲"For key control dimensions.
5.0 1um≈40u"

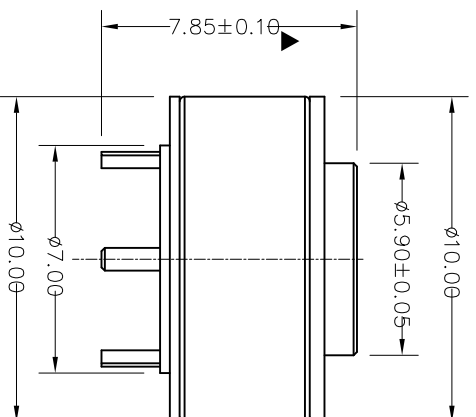

PCB LAYOUT
Layout Tolerance: ±0.05mm

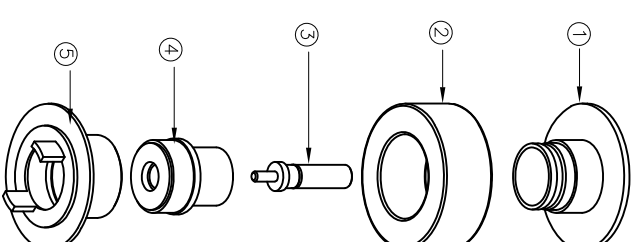

5	Back shell	1pcs	C3604	Nickel 5.0um min plated	10.0*6.35
4	Rubber compound	3g	PA9T		Black
3	Pin	1pcs	Ledded Brass	Gold 0.075um min plated over 1.25~3.0um Nickel	2.0*7.75
2	Magnet	1pcs	NS2	Nickel 5.0um min plated	10.0*4.0*5.75
1	Front shell	1pcs	SUS316F		10.0*5.65
Item	Part Name	QTY	Material	Finish	Remarks

UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES LINEAR TOLERANCE: X:±0.20 ,X±0.15 ,XX±0.10 X:±2° ,X*:±0.5° Pomagtor Website:www.pomagtor.net			POMAGTOR POGO PIN - 16 YEARS OF PROFESSIONAL Magnetic connection-professional for customization		
TITLE	Circular magnetic connector	REV	A0	DRAWN BY	CHECKED BY
SPEC	10.0mm-3PIN-3-1/F	SCALE	1	DATE	21/06/11
PART NO	RD91.HH0210611-002	UNIT	mm	ShenYou WU	HongJun Hu
VEIW ANGLE		SHEET	1 of 1	QingSong Ge	