
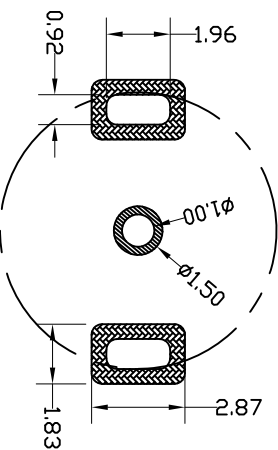
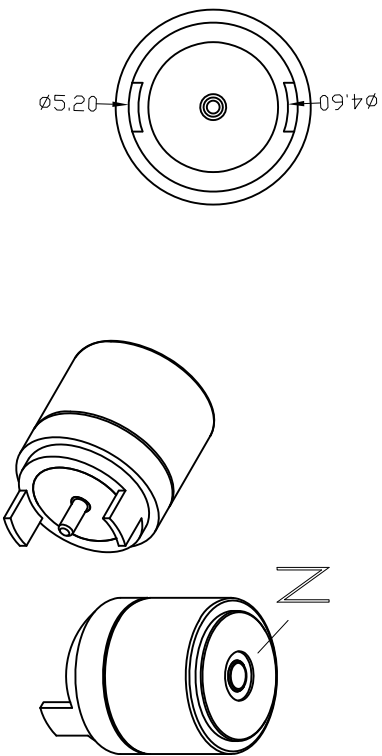



REV	ECN NO.	DETAILS	BY	DATE
1				
2				
3				

NOTES:

- 1.0 Rated voltage(Per Contact):5 Volts
2.0 Rated Current(Per Contact):1A maximum
3.0 Working Temperature Range: -30~85℃
4.0 "▲"For key control dimensions.
5.0 1um≈40u"

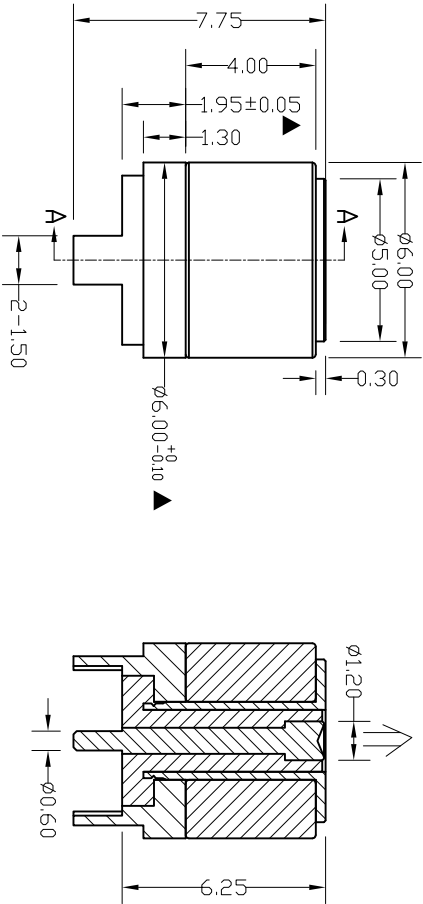

PCB LAYOUT
Layout Tolerance:±0.05mm

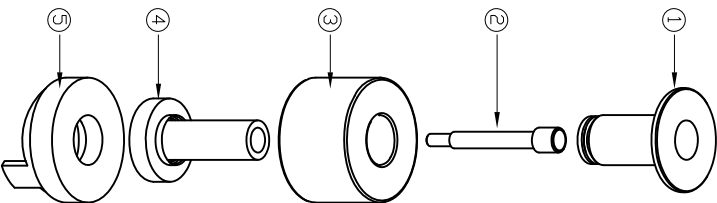

5	Back shell	1pcs	C3604	Nickel 5.0um min plated	$\phi 6.0 \times 3.45$
4	Rubber compound	3g	PA9T		Black
3	Magnet	1pcs	NS2	Nickel 3.0um min plated	$\phi 6.0 \times 4.0$
2	Pin	1pcs	Leaded Brass	Gold 0.075um min plated over 1.25~3.0um Nickel	$\phi 1.2 \times 7.7$
1	Front shell	1pcs	SUS316L		$\phi 5.0 \times 5.6$
Item	Part Name	Q'TY	Material	Finish	Remarks

*UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES LINEAR TOLERANCE: X:±0.20 ,X±0.15 ,XX±0.10 X°.±2° ,X°.±0.5° Pomagtor Website:www.pomagtor.net		POMAGTOR POGO PIN - 16 YEARS OF PROFESSIONAL Magnetic connection-professional for customization				
TITLE	Circular magnetic connector	REV	A0	DRAWN BY	CHECKED BY	APPROVED BY
SPEC	6.0mm-2PIN-3 /F	SCALE	1			
PART NO	RD91.HHJ0210323-002	UNIT	mm			
VEIW ANGLE		DATE	21/03/23	HJH	HXH	QS.G
		SHEET	1 of 1			