

REV.	ECN	NO	LOCAS.	DESCRIPTION	DATE	DESIGN
A0				NEW	2011.03.23	譚立強

NOTE:

1. Material

. Cover: Black PA46(UL94V-0)

. Plunger: Brass

2. Plating

. Contact surface: 3u" minimum Au over 80~100u" Ni

3. Electrical

. Rated Current & Voltage: DC 12V; AC 1A

. Contact Resistance: 25mΩ maximum

4. RoHS COMPLIED PRODUCT.


5. Elasticity: Stroke 0mm : 10gf Stroke 0.5mm : 100gf Stroke 0.90mm (or fully compressed) : 160~250gf

6. Life (Million) : stroke range Max 0.5~4mm, 根据Pin的总类不一样

Max.Stroke 10000次 Touch down

后重量变化 0.5gf以内 Creep变形最小化

7. Temperature: -40度~150度

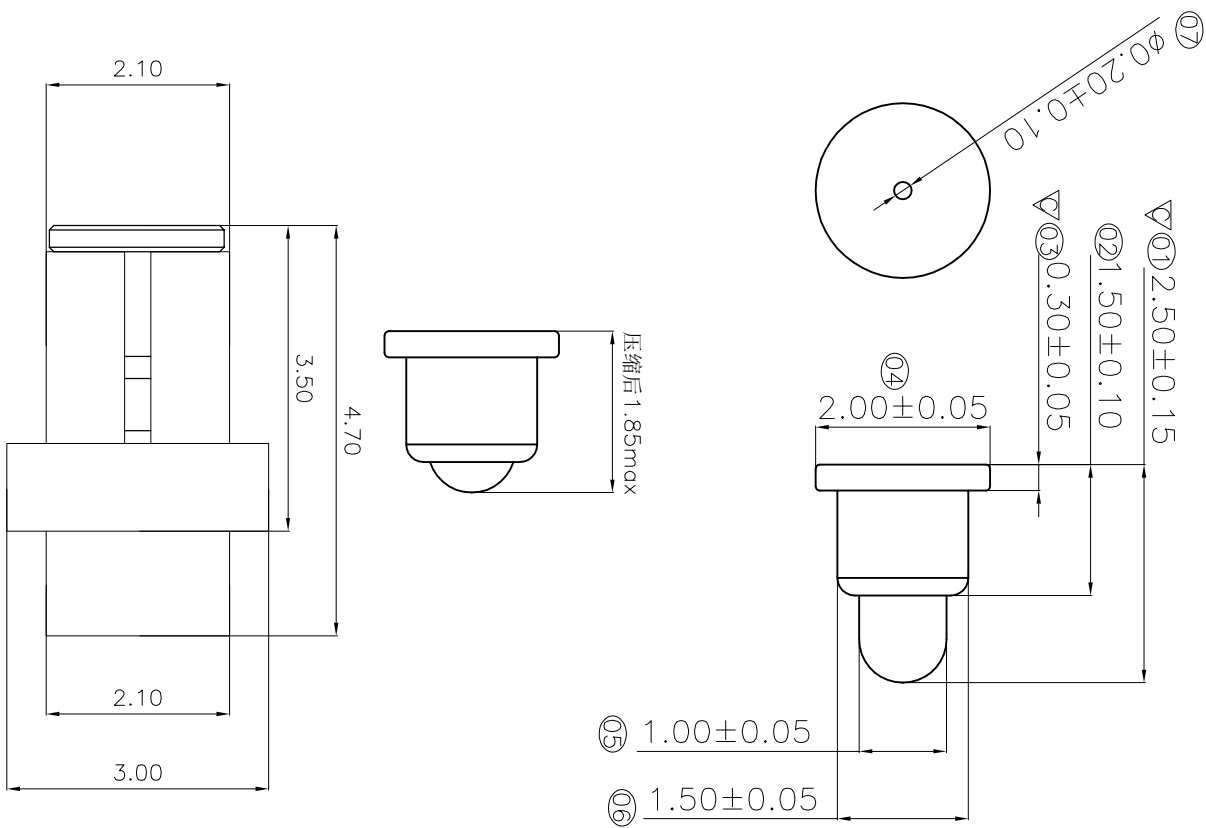

泰科漢澤 Tyco Hanconn Precision Electronic Co.,Ltd

DRAW NO.	DATE	MATERIAL:	SEE NOTE	DRAW NAME:
DESIGN: 譚立強	2011.03.23	FINISH:	SEE NOTE	POGO PIN 2.0*2.5
CHECK:		FILE:		
REVIEW:		REV. A0	SCALE N/A	UNIT: mm
				SHEET: 1/1