


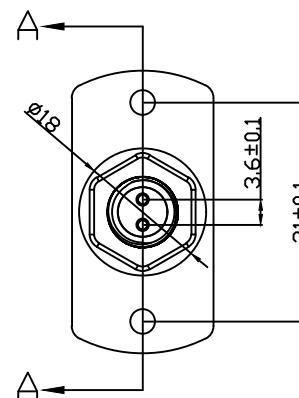
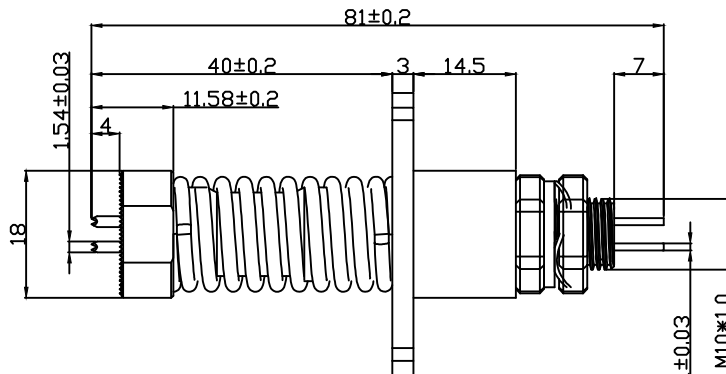


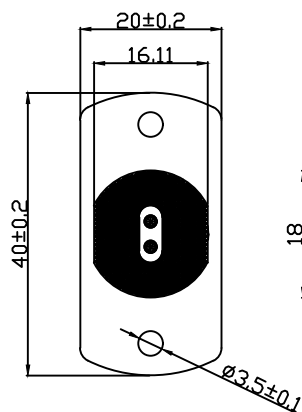

REV	ECN NO.	DETAILS	BY	DATE
A0	-	new version release	XFY	2022.05.17

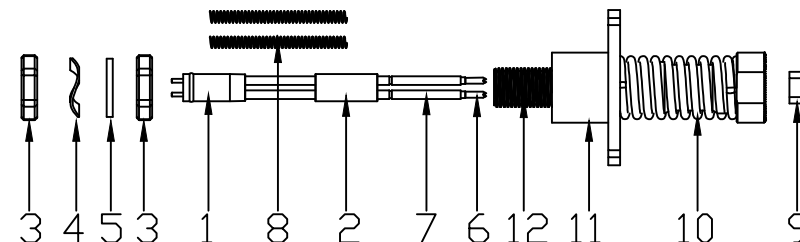

- NOTES:
- 1.0 Rated voltage: 220 Volts
 - 2.0 Rated Current: 60A
 - 3.0 Contact Resistance: 30mΩ maximum
 - 4.0 Recommended Working Stroke&Force:
1) Stroke 6mm: 300±50gf
2) Stroke 6mm: 10kgf±1kgf
 - 5.0 Mechanical life:
1) Mechanical life: 20,000 Cycles Min
 - 6.0 Salt spray test 48 hours
 - 7.0 Working Temperature Range: -30~85°C

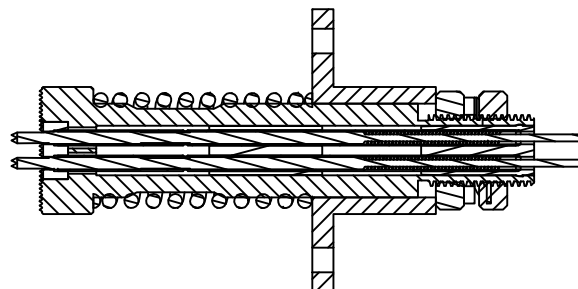

12	RD75.XFY220517-001	大电流探针螺杆 Ø18*70 材质: 黄铜-无铅, 镀镍	1PCS
11	RD75.SN220601-01	Φ20*40*17.5 大电流探针胶芯 材质: PP 灰白色	1PCS
10	HY53S.1381603400-01	1.6*13.8*34*7N (并圈) 材质SUS304 下压至18.5 弹力10KG 寿命10W次以上	1PCS
9	RD75.SN220601-04	8.1*3.3*3.5 大电流探针胶芯 材质: 铁氟龙黑色	1PCS
8	HY53S.1700122300-01	0.28*1.7*23*45N (并圈) 材质SUS304 下压至17 弹力300±50 (外径±0.05 线径±0.005 总长±0.3 寿命10W次以上)	2PCS
7	RD75.ZMJ20220518-01	大电流探针螺杆 材质: SUS304 Φ2.2*65.2	2PCS
6	N/A	Ø1.8*81 材质: 无铅黄铜镀镍50~120u" 镀金3u", 过48小时盐雾	2PCS
5	RD75.ZMJ20220518-02	大电流探针螺杆垫片 材质: SUS304 Φ15*Φ10.1*1.5	1PCS
4	RD75.ZMJ20220518-04	大电流探针螺杆三峰波纹垫片 材质: SUS304 钝化 10.1*12.3	1PCS
3	RD75.ZMJ20220518-03	大电流探针螺杆螺母 材质: SUS304 钝 M10*1.0*T4	2PCS
2	RD75.SN220601-03	Φ6.9*16 大电流探针胶芯 材质: 铁氟龙黑色	1PCS
1	RD75.SN220601-02	Φ7*16 大电流探针前塞 材质: 铁氟龙黑色	1PCS
项次	零件料号	规格描述	用量

*UNLESS OTHERWISE STATED
ALL DIMENSIONS ARE IN
MILLIMETRES
LINEAR TOLERANCE:
X:±0.20 .X:±0.15 .XX:±0.10
X*:±2° .X*:±0.5°
Pomagtor
Website:www.pomagtor.net

POMAGTOR
POGO PIN - 16 YEARS OF PROFESSIONAL
Magnetic connection-professional for customization

TITLE	60A电流探针	REV	A0	DRAWN BY	CHECKED BY	APPROVED BY
SPEC	/	SCALE	1			
PART NO	RD75.SN220606-01	UNIT	mm			
VEIW ANGLE		DATE	2022/05/31			
		SHEET	1 of 1			